
Long Reach 24-26t

14m Supply = 8.20m boom + 5.90m dipper + 20t Class Linkage (Bucket 1.2m³ R1.2m)
16m Supply = 9.40m boom + 7.10m dipper + 20t Class Linkage (Bucket 1.0m³ R1.0m)
18m Supply = 10.60m boom + 8.30m dipper + 13t Class Linkage (Bucket 0.8m³ R0.8m)

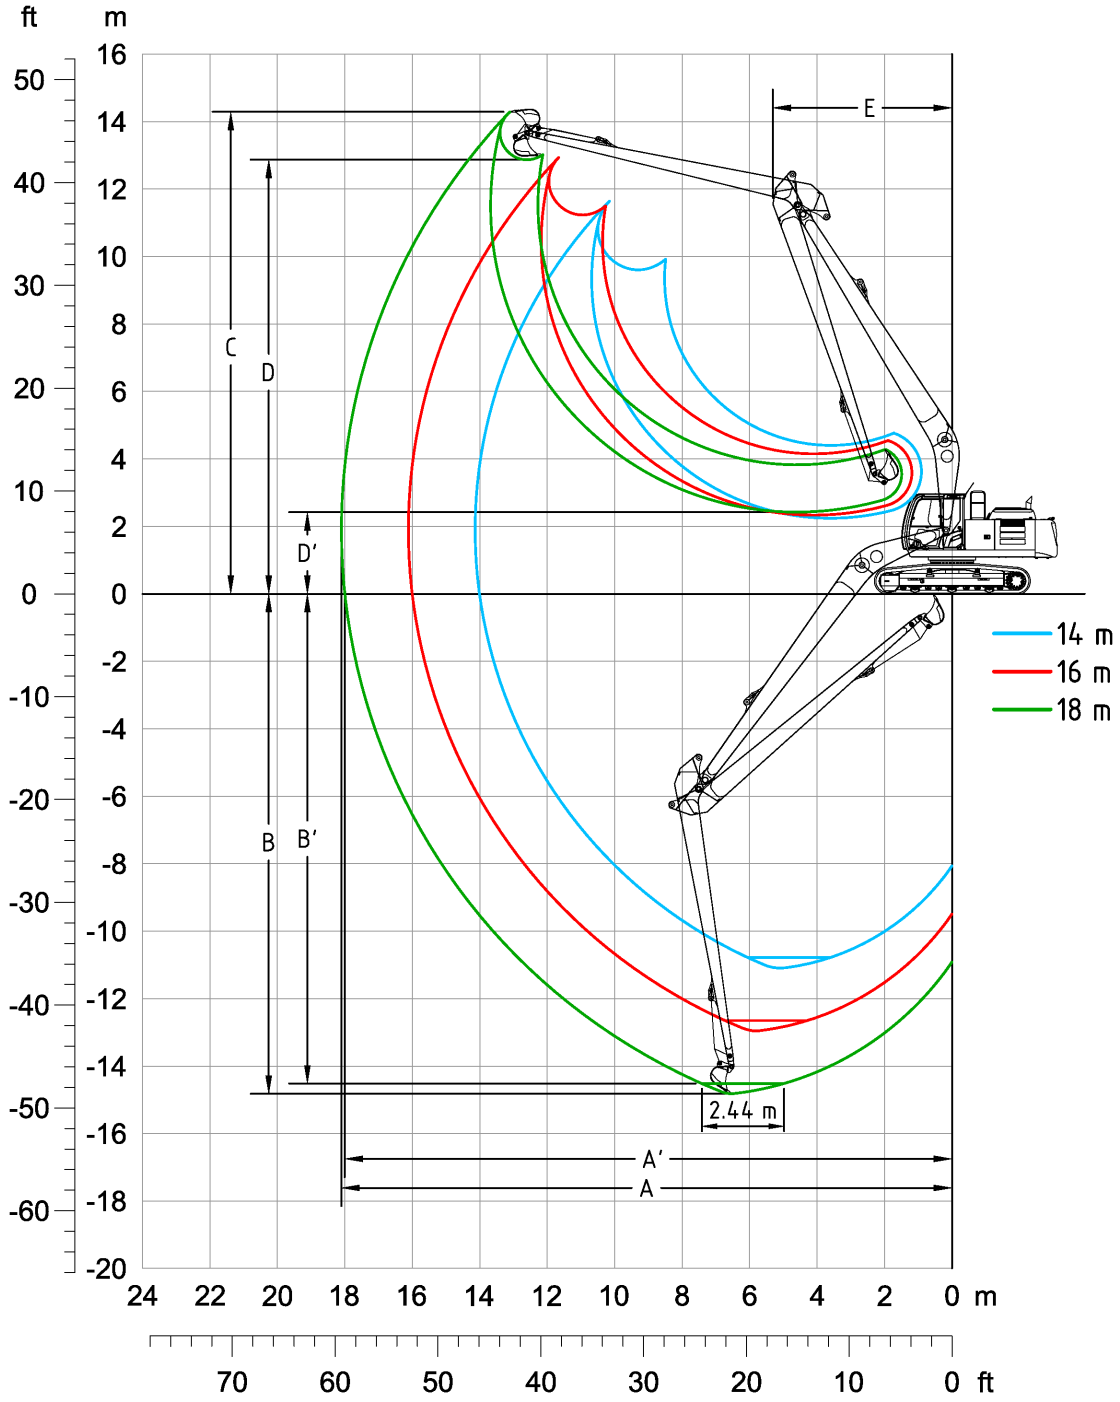

Unit: mm

Equipment Outreach		14m	16m	18m
A	Max. digging reach	14 140	16 120	18 100
A'	Max. digging reach (on ground)	14 010	16 010	18 000
B	Max. digging depth	11 090	12 960	14 820
B'	Max. digging depth for 2.44m level	10 780	12 650	14 520
C	Max. cutting height	11 640	12 940	14 290
D	Max. dumping height	9 600	11 230	12 870
D'	Min. dumping height	2 240	2 330	2 420
E	Min. swing radius	4 270	4 800	5 320

www.kocurek.com
T:+44 (0) 1473 217 477
E: sales@kocurek.co.uk

Notes:

1. Ratings are based on ISO 10567. Capacities do not exceed 87% of hydraulic capacity or 75% of tipping capacity.
2. Lifting capacities are calculated at attachment pivot pin. Attachment not included in figures.
3. Rated loads marked "**underlined**" are limited by hydraulic capacity.

Rating over front Rating over side

14m Outreach

Conditions	Load point height (m)	At max. reach			Attachment pin horizontal distance from slew pivot											
					12.5 m		10.5 m		8.5 m		6.5 m		4.5 m		2.5 m	
				Reach (m)												
2.5t additional counterweight	8.0	2417	2417	11.38			3009	3009								
	6.0	2463	2463	12.26			3198	3198	3288	3288						
	4.0	2589	2589	12.76	2968	2968	3533	3533	3896	3896	4538	4538				
	2.0	2807	2807	12.94	3542	3369	3940	3940	4610	4610	5883	5883	8912	8912		
	0.0	3154	3154	12.80	3771	3282	4335	4157	5274	5274	7034	7034	9566	9566	3510	3510
	-2.0	3720	3279	12.33			4632	4037	5754	5294	7740	7493	9460	9460	5303	5303
	-4.0	4278	3557	11.50			4742	3982	5962	5199	7964	7378	11197	11197	7265	7265
	-6.0	4679	4151	10.21					5805	5213	7697	7415	10991	10991	9526	9526
Unit: kg	-8.0	5219	5219	8.25							6779	6779	9469	9469	12283	12283

16m Outreach

Conditions	Load point height (m)	At max. reach			Attachment pin horizontal distance from slew pivot											
					15.0 m		12.5 m		10.0 m		7.5 m		5.0 m		2.5 m	
				Reach (m)												
2.5t additional counterweight	10.0	1856	1856	12.72			2011	2011								
	7.5	1861	1861	14.02			2349	2349								
	5.0	1942	1942	14.79			2571	2571	2790	2790						
	2.5	2102	2102	15.11	2230	2230	2878	2878	3352	3352	4268	4268	6523	6523		
	0.0	2369	2369	15.00	2369	2369	3200	3128	3917	3917	5318	5318	8589	8589	2584	2584
	-2.5	2816	2464	14.46			3456	2996	4352	4009	6010	5790	7820	7820	4149	4149
	-5.0	3269	2683	13.44			3558	2938	4560	3898	6265	5644	9234	9234	5852	5852
	-7.5	3621	3192	11.81					4436	3915	6055	5683	9027	9027	7812	7812
Unit: kg	-10.0	4106	4106	9.24							5196	5196	7550	7550	10186	10186

18m Outreach

Conditions	Load point height (m)	At max. reach			Attachment pin horizontal distance from slew pivot											
					17.0 m		14.0 m		11.0 m		8.0 m		5.0 m		2.0 m	
				Reach (m)												
2.5t additional counterweight	12.0	1428	1428	13.99												
	9.0	1410	1410	15.75			1780	1780								
	6.0	1461	1461	16.80			1947	1947	2111	2111						
	3.0	1580	1580	17.27	1810	1810	2204	2204	2596	2596	3374	3374	5422	5422		
	0.0	1789	1789	17.20	2001	1890	2489	2489	3112	3112	4399	4399	6319	6319		
	-3.0	2145	1887	16.59			2727	2397	3525	3304	5089	4951	5831	5831	3243	3243
	-6.0	2535	2061	15.38			2837	2325	3733	3170	5346	4775	7115	7115	4702	4702
	-9.0	2839	2499	13.40					3635	3189	5147	4830	8167	8167	6328	6328
Unit: kg	-12.0	3264	3264	10.21							4302	4302	6579	6579		