
HD TAB[1, 3] 19m (62ft)

1st Boom[4] 1.6m / 5ft 3in
+ 2nd Boom 5.5m / 18ft
+ Dipper 3.7m / 12ft 2in

Available Outreach:	12m / 39ft[1]	14m / 46ft[1]	16m / 52ft[1]
	Attachment Weight[2]:		
KE **"Standard"** Conversion:	9 000kg / 19 842 lbs	-	-
KE **"Advanced"** Conversion:	9 000kg / 19 842 lbs	7 000kg / 15 432 lbs	-
KE **"Elite"** Conversion:	→	9 000kg / 19 842 lbs	7 000kg / 15 432 lbs

[1] *Pin height & outreach dependant on OEM Dipper supply. Above values are calculated with a 3.7m dipper.*
[2] *Including quick hitch, adapter plate & attachment.*
[3] Sweep shown with "KE Elite Conversion". Offering may differ with standard or advanced conversion. Equipment lengths may vary.
[4] Standard / Advanced differing equipment lengths; 1st Boom 1.35m / 4ft 5in.

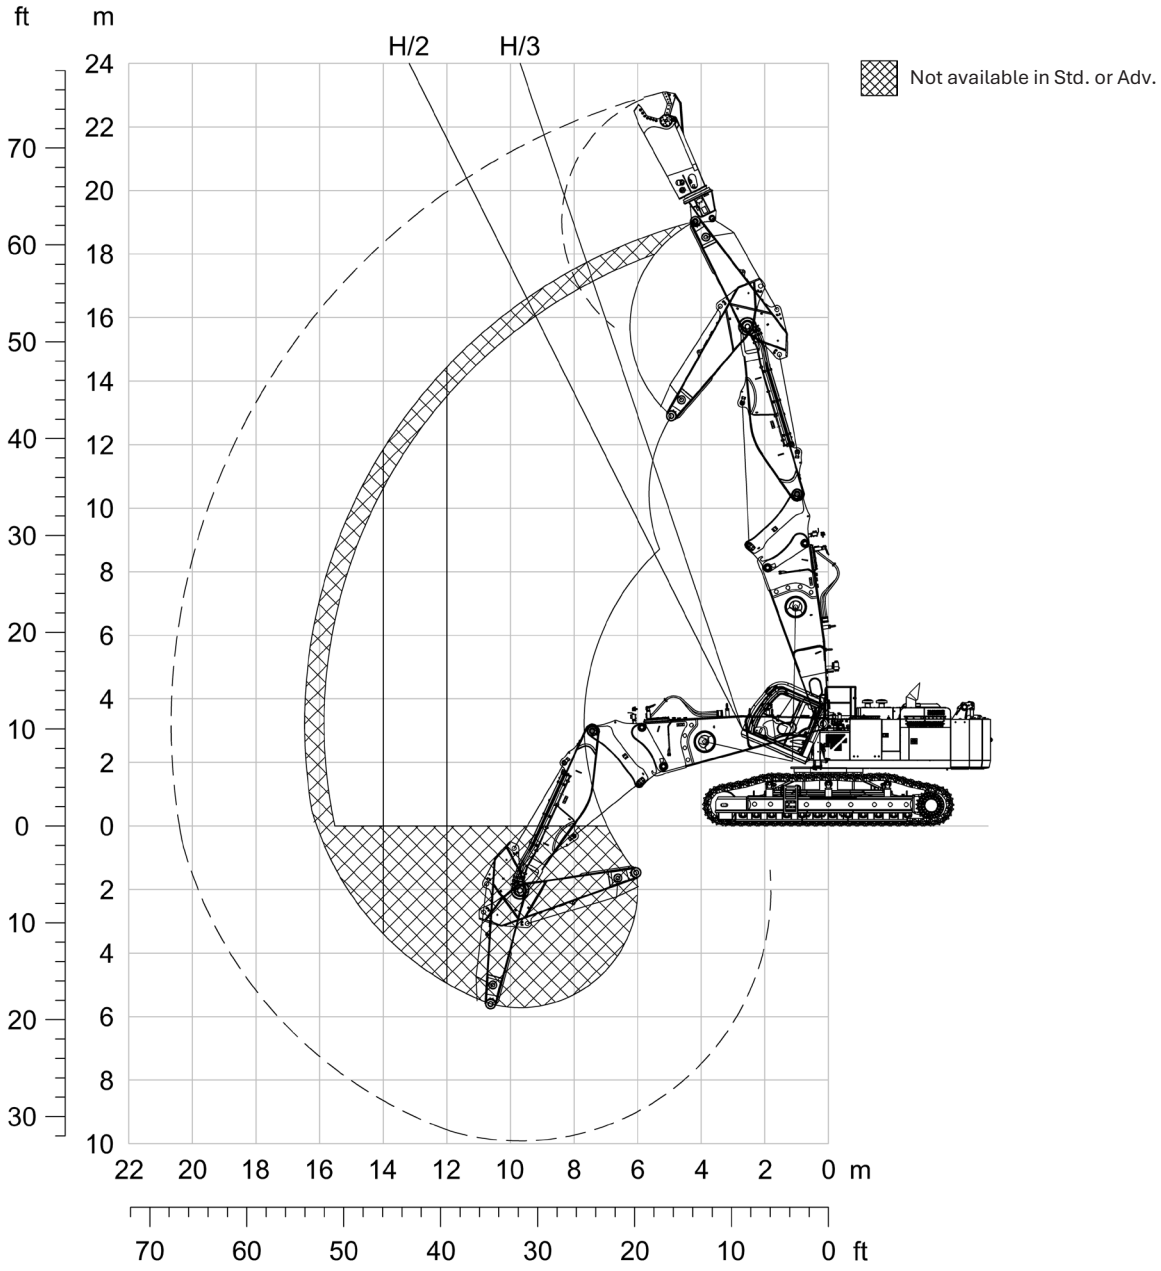

44 (0) 1473 217 477

sales@kocurek.co.uk